

JBC

www.jbctools.com



MV

AIR PRESSURE
DESOLDERING SYSTEM

MV/AIR PRESSURE DESOLDERING SYSTEM


MV-A
DESOLDERING PUMP



0780637
CONNECTION CABLE



MANUAL

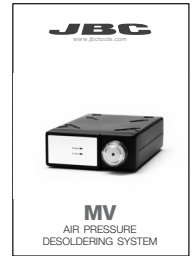

0821830
SUCTION FILTER SET



0005966
50 FILTERS BOX



0781046
SPARE COTTON FILTERS




0008446
ESCAPE FILTER



INSTALLATION

DD-2B
CONTROL UNIT

MV-A
DESOLDERING
PUMP



Connectable control units:
DI, DD and DM.

Connectable singles line:
DV.

Air
Compressed
inlet

Power Cord Socket
Equipotential connection

DR560-A
DESOLDERING IRON




DR-SC
DESOLDERING
STAND



AIR PRESSURE DESOLDERING SYSTEM ELEMENTS



CHANGING PUMP FILTERS

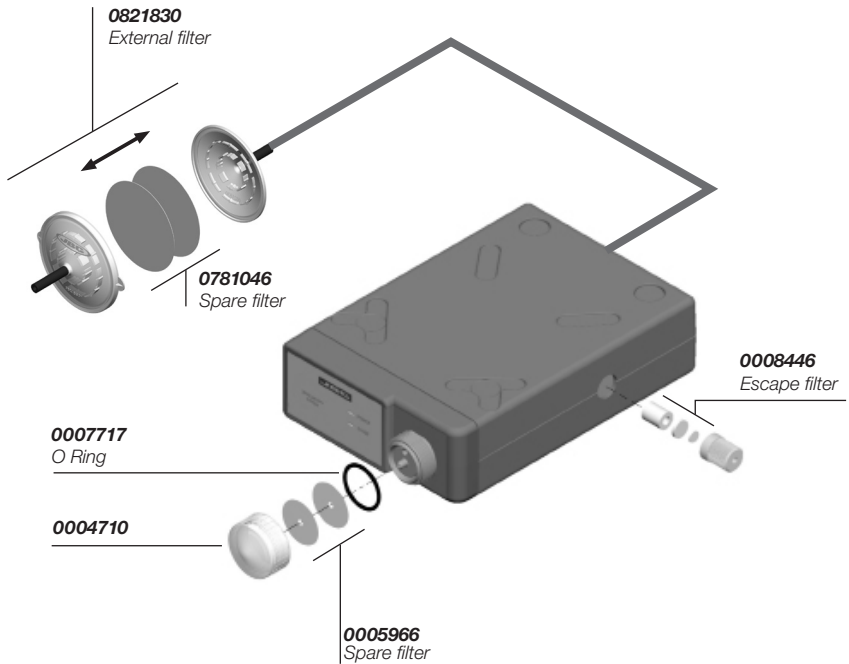

TECHNICAL SPECIFICATIONS

- Recommended air pressure: 5 bars
(max. 6 bares)
- Supply: 24V
- Power: 10W
- Weight of complete unit: 1,5 Kgs.
- Complies with CE standards on electrical safety, electromagnetic compatibility
and ESD protected housing "skin effect"
- RoHS compliant
- Equipotential connector and the tool tip are connected to station mains ground supply for ESD protection



This product should not be
thrown in the garbage.

JBC

WARRANTY

JBC's 2 years warranty guarantees this equipment against all manufacturing defects, covering the replacement of defective parts and all necessary labour.

Warranty does not cover product wear due to use or mis-use.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased enclosing this fully filled in, sheet.

SERIAL N°

STAMP OF DEALER

DATE OF PURCHASE

www.jbctools.com